



DROP-IN Circulator

400 ~ 450 MHz

ADC043GD(50)

Features

- 19dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	400 ~ 450
Insertion Loss	dB Max.	0.50
Isolation	dB Min.	17
VSWR	Max.	1.38 : 1
Temperature	°C	- 20 ~ +80
REV Power	W Max.	100
Input/Output Impedance	Ω	50

Mechanical Dimensions

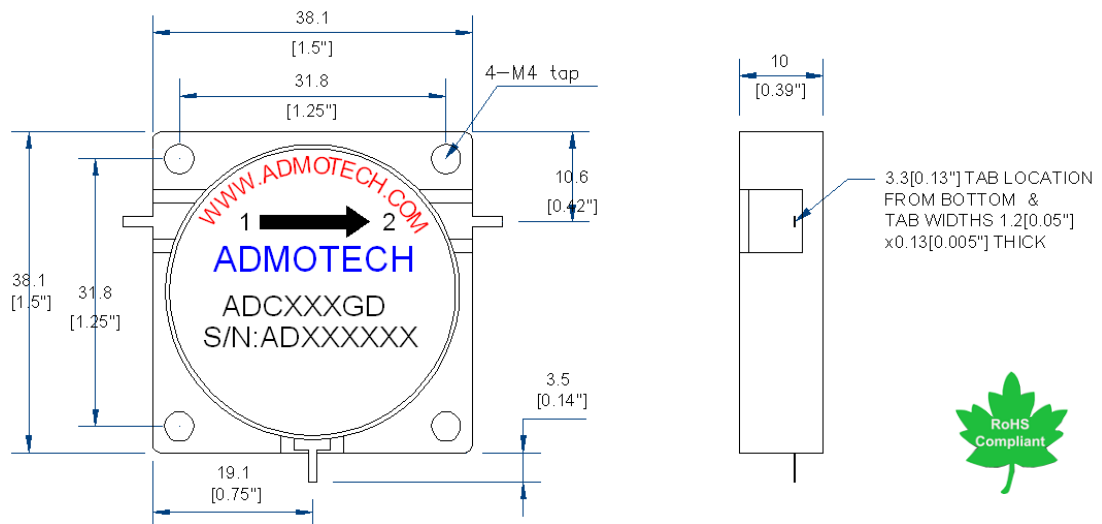

Unit: mm[inch]

Package Size : GD

Option Type : None

Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com