



# Coaxial SMA Type Circulator 1700 ~ 3500 MHz

## ADC1735CSIH

### Features

- 19dB typical Isolation, 0.45dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

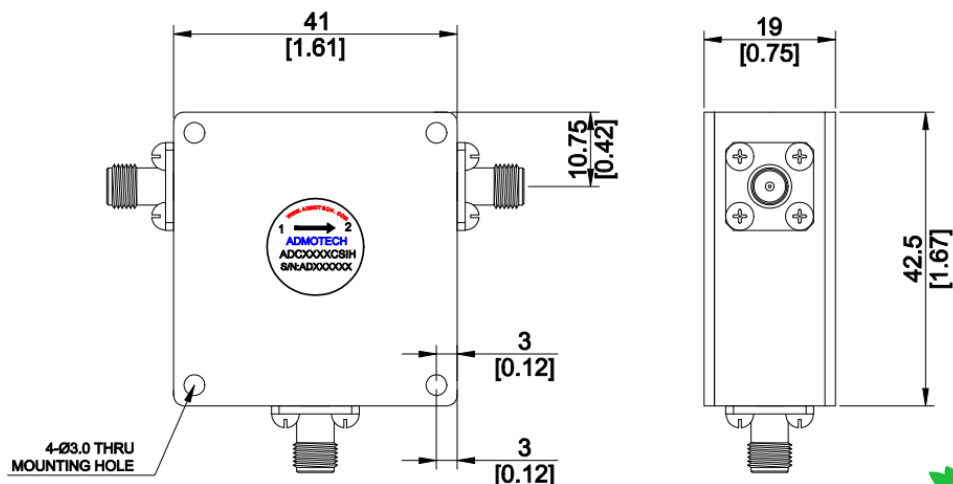
### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	1700~3500
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	16.5
VSWR	Max.	1.35 : 1
Temperature	°C	-5 ~ 55
FDW./REV. Power	W Max.	50/50
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]  
Tolerance:  $\pm 0.2$ mm



If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)