



# DROP-IN Circulator 2300 ~ 2700 MHz

**ADC250CE(400)**

## Features

- 20dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

## Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

## Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2300 ~ 2700
Insertion Loss	dB Max.	0.50
Isolation	dB Min.	18
VSWR	Max.	1.33 : 1
Temperature	°C	- 30 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	Ω	50

## Mechanical Dimensions

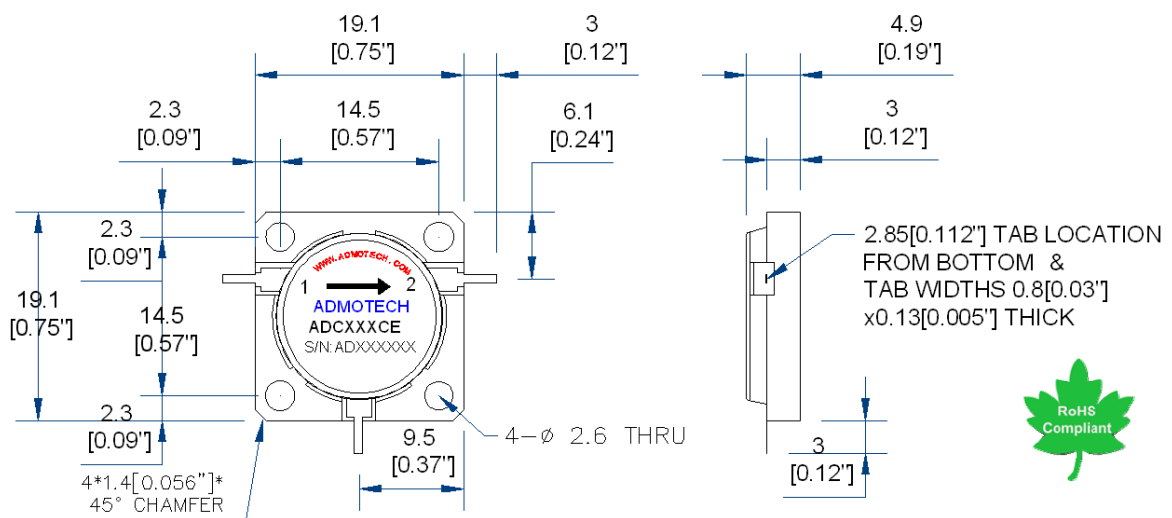

Package Size : CE  
Option Type : none  
Direction:Clockwise Default

Unit: mm[inch]  
Tolerance: ±0.2mm

If you do not find appropriate frequency range, Please contact with sales@admotech.com