



# Coaxial SMA Circulator 2500 ~ 5000 MHz

## ADC2550CSIH

### Features

- 20dB typical Isolation, 0.3dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

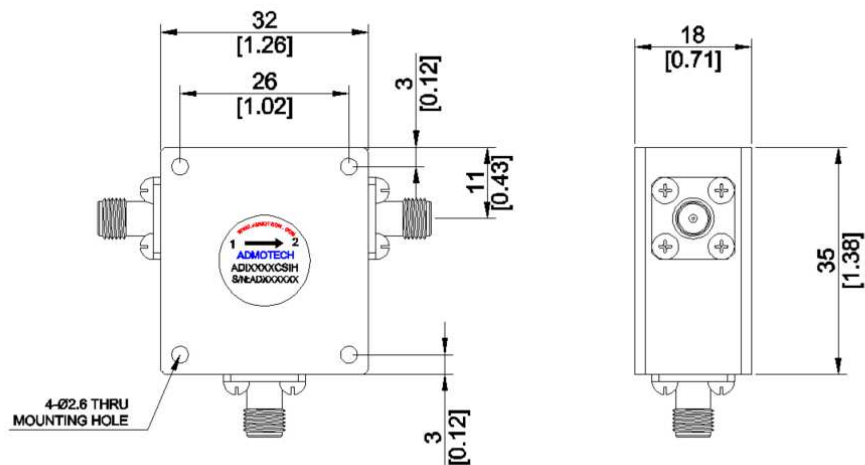
### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2500~5000
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	16.5
VSWR	Max.	1.35
Temperature	°C	-30 ~ 70
FWD./REV. Power	W Max.	50/50
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]  
Tolerance:  $\pm 0.2$ mm



If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)