



Coaxial SMA Type Circulator 3400 ~ 4900 MHz

ADC415CSIH

Features

- 24dB typical Isolation, 0.3dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

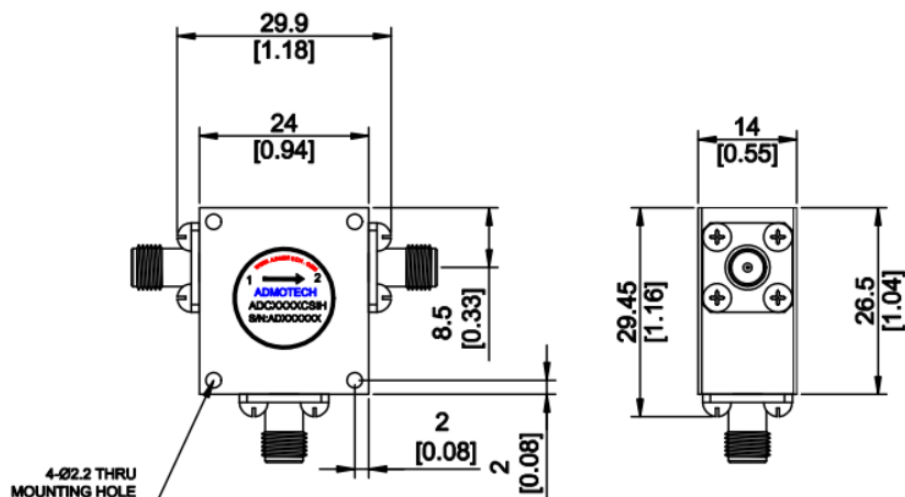
Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	3400~4900
Insertion Loss	dB Max.	0.5
Isolation	dB Min.	20
VSWR	Max.	1.25 : 1
Temperature	°C	-30 ~ 85
FDW./REV. Power	W Max.	50/50
Input/Output Impedance	Ω	50

Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]
Tolerance: ± 0.2 mm



If you do not find appropriate frequency range, please contact with sales@admotech.com