

**ADMOTEC**

Advanced Mobile Technology

1320,Gwanpyoung-dong,Yoosung-Gu,Taejon,305-509, Korea

Tel :+82-42-936-1353 Fax :+82-42-936-1350

DROP-IN CIRCULATOR 5700 ~ 5900MHz

ADC580DD(200)

Features

- 21dB typical Isolation, 0.25dB typical Insertion Loss at room temperature.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose ad followers

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	5700 ~ 5900
Insertion Loss	dB Max.	0.50
Isolation	dB Min.	19
VSWR	Max.	1.25 : 1
Temperature	°C	- 30 ~ +85
Power	W Max.	50
Input/Output Impedance	Ω	50

Mechanical Dimension

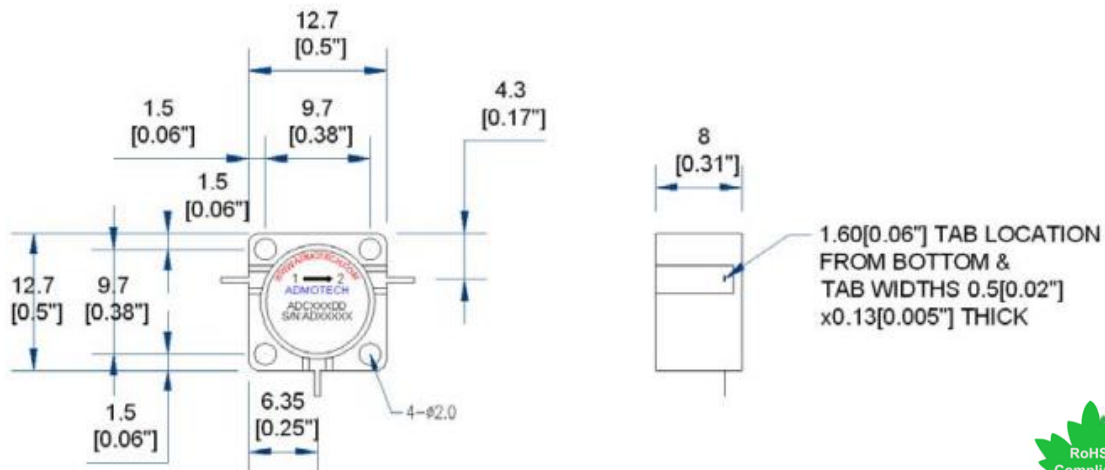

Package Size : DD

Option Type : None

Direction:Clockwise Default

Unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, Please contact with sales@admotech.com