



# Coaxial SMA Type Circulator 9000 ~ 9500 MHz

## ADC925CSYH


### Features

- 19dB typical Isolation, 0.45dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	9000 ~ 9500
Insertion Loss	dB Max.	0.65
Isolation	dB Min.	17
VSWR	Max.	1.38 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	30/20
Input/Output Impedance	Ω	50

### Mechanical Dimensions

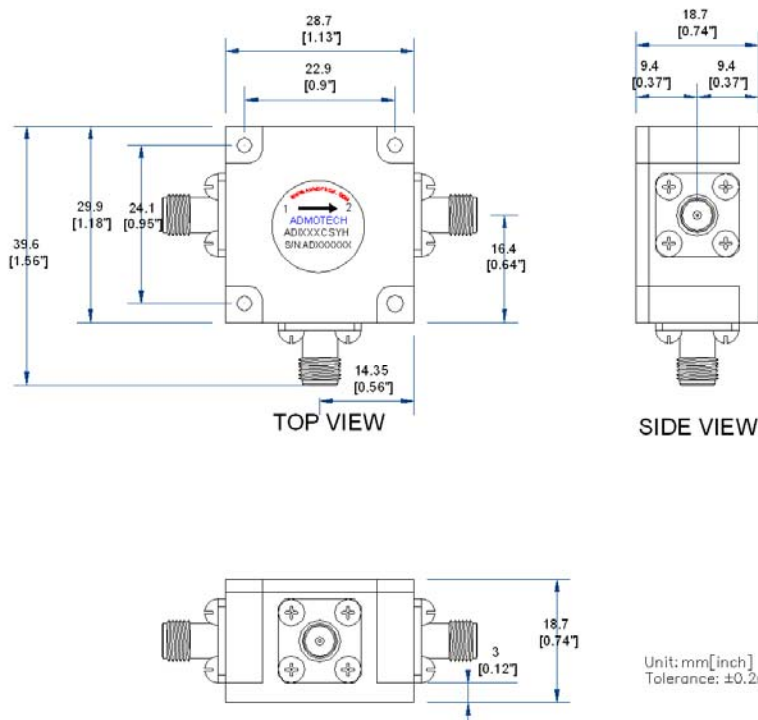

Unit: mm[inch]  
Tolerance: ±0.2mm

If you do not find appropriate frequency range, Please contact with [sales@admotech.com](mailto:sales@admotech.com)