



DROP-IN Circulator

9.0 ~ 9.5 GHz

ADC925DD

Features

- Designed for Military, Radar, ECT
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	9,000 ~ 9,500
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	17
VSWR	Max.	1.30
Operating Temperature	°C	- 20 ~ +85
Power	CW Max.	50
Input/Output Impedance	Ω	50

Mechanical Dimensions

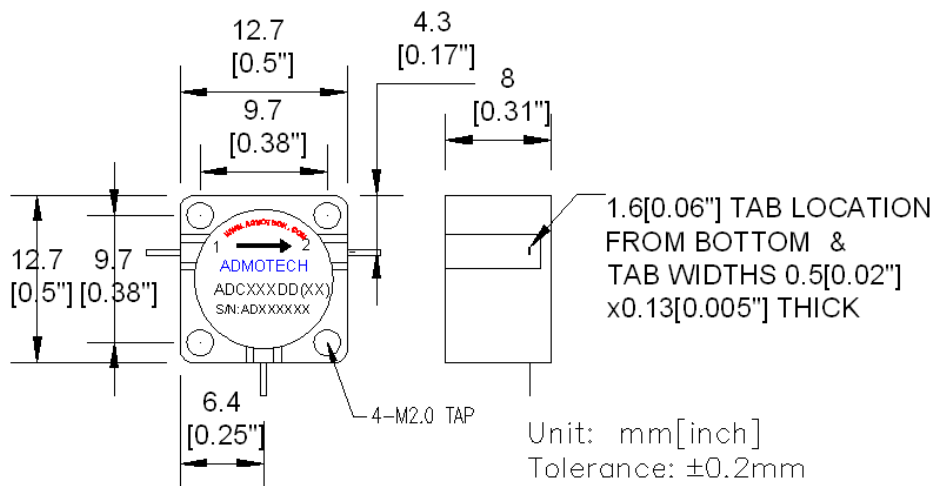

Package Size : DD

Option Type : none



If you do not find appropriate frequency range, Please contact with sales@admotech.com