



## DROP-IN Circulator

### 9200 ~ 9800 MHz

### ADC940DD(800)

### Features

- Custom products available with alternate configurations such reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

### Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	9000 ~ 9800
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	15
VSWR	Max.	1.45 : 1
Temperature	°C	- 20 ~ +85
Power	W Max.	20
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

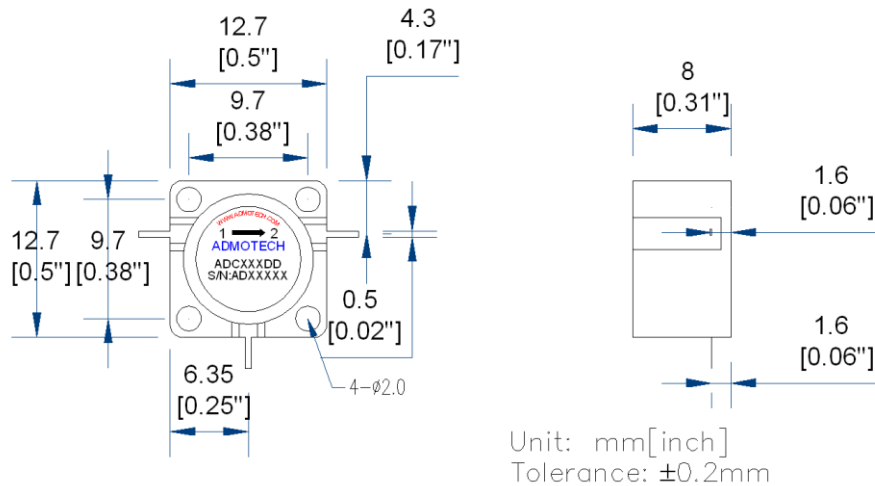

Package Size : DD  
Option Type : None



If you do not find appropriate frequency range, Please contact with [sales@admotech.com](mailto:sales@admotech.com)