



Waveguide X-band Circulator

9.3 ~ 9.9 GHz

ADC960WR90

Features

- High peak and average power capacity
- Robust design for shock and vibration
- RoHS Compliant

Options


The customers can choose as follows

- Direction: Clockwise (Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	9.3~9.9
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
VSWR	Max.	1.2 : 1
Temperature	°C	-30 ~ 85
Forward Power	W Max.	400(Peak 2kW)
Waveguide Package	-	WR90

Mechanical Dimensions

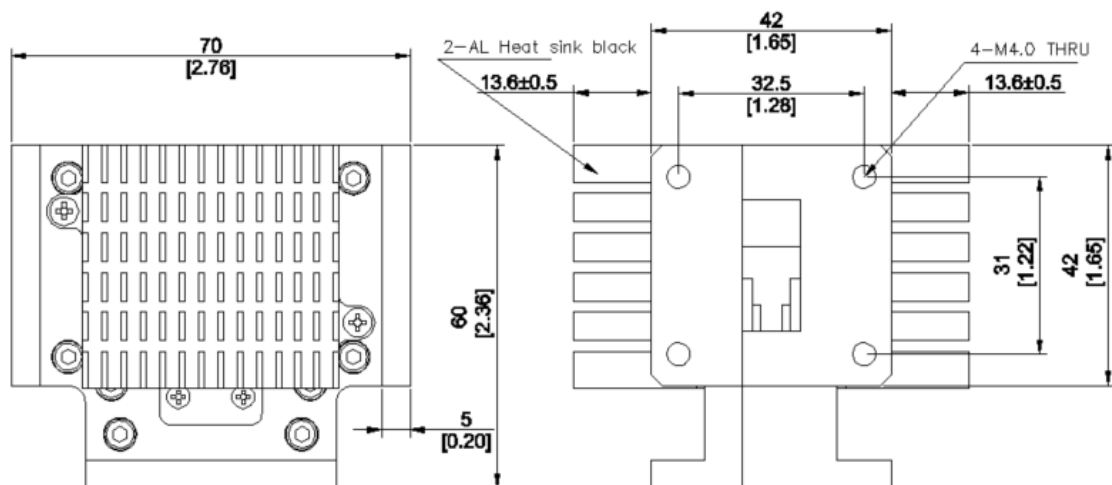

TOP VIEW

SIDE VIEW



unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, please contact with sales@admotech.com