



DROP-IN ISOLATOR

4.4~6.0 GHz

ADI520DDT(1.6G)


Features

- 19dB typical Isolation, 0.4dB typical insertion loss at room temperature.
- The Customers can choose as followers
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	4.4~6.0
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	16
VSWR	Max.	1.38 : 1
Operating Temperature	°C	- 40 ~ +85
FWD.REV. Power	W Max.	30/10
Input/Output Impedance	Ω	50

Mechanical Dimensions

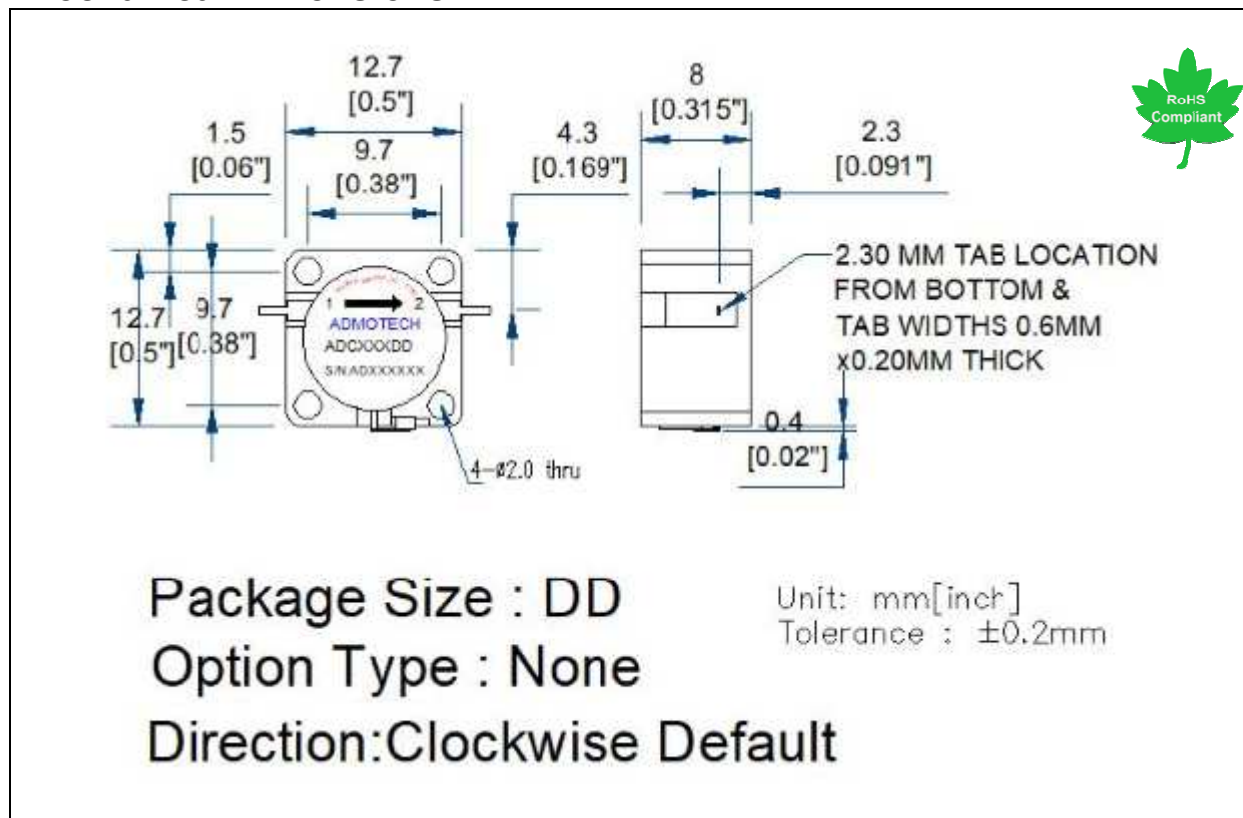

If you do not find appropriate frequency range, Please contact with sales@admotech.com