



# Coaxial SMA Type Isolator 1800 ~ 2500 MHz

## ADI215CSPH(700)



### Features

- 11dB typical Isolation, 0.85dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	1800 ~ 2500
Insertion Loss	dB Max.	1.05
Isolation	dB Min.	9
VSWR	Max.	2.32 : 1
Temperature	°C	- 30 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	Ω	50

### Mechanical Dimensions

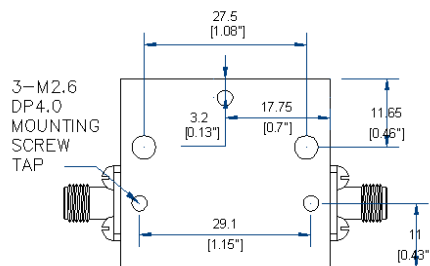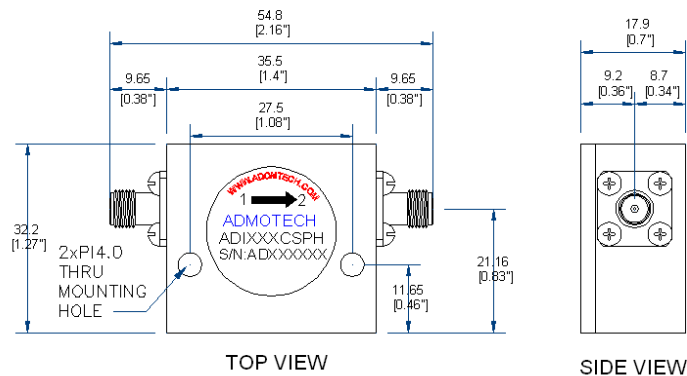

Unit:mm[inch]  
Tolerance : ±0.2mm



If you do not find appropriate frequency range, Please contact with sales@admotech.com