



Coaxial SMA Type Isolator 4400 ~ 4900 MHz

ADI465CSKH


Features

- 18dB typical Isolation, 0.50dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant


Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	4400 ~ 4900
Insertion Loss	dB Max.	0.65
Isolation	dB Min.	16
VSWR	Max.	1.38 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	60/50
Input/Output Impedance	Ω	50

Mechanical Dimensions

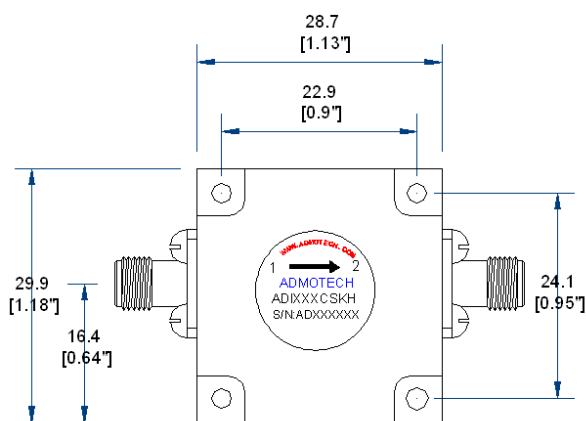

TOP VIEW

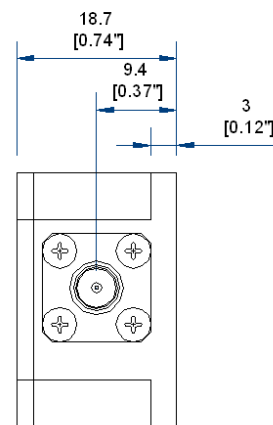

SIDE VIEW

Unit: mm[inch]
Tolerance: ±0.2mm