



# Coaxial SMA Type Isolator 4950 ~ 5150 MHz

## ADI505CSKH


### Features

- 21dB typical Isolation, 0.45dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant


### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	4950 ~ 5150
Insertion Loss	dB Max.	0.65
Isolation	dB Min.	19
VSWR	Max.	1.29 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	60/50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

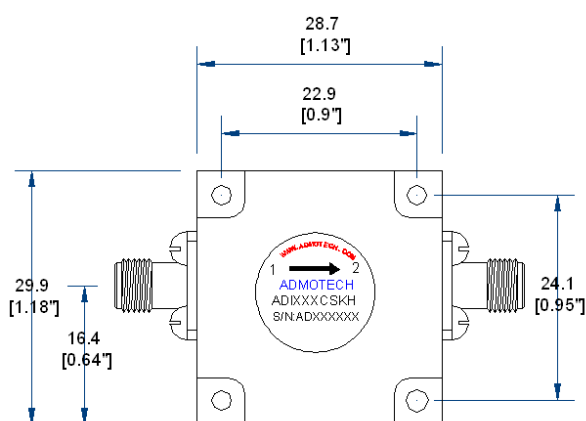

TOP VIEW

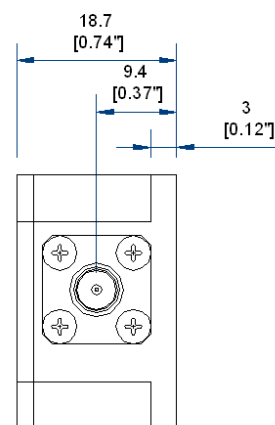

SIDE VIEW

Unit: mm[inch]  
Tolerance: ±0.2mm