



Coaxial SMA Type Isolator 5000 ~ 5800 MHz

ADI540CSKH


Features

- 17dB typical Isolation, 0.55dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	5000 ~ 5800
Insertion Loss	dB Max.	0.80
Isolation	dB Min.	15
VSWR	Max.	1.43 : 1
Temperature	°C	- 20 ~ +85
FWD/REV Power	W Max.	50/20
Input/Output Impedance	Ω	50

Mechanical Dimensions

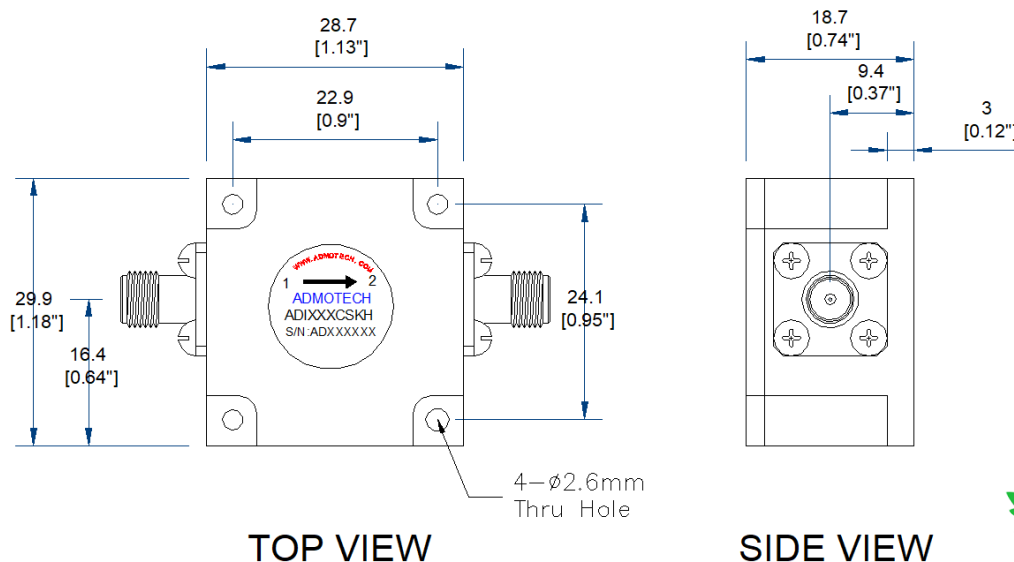

Unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, Please contact with sales@admotech.com