



# DROP-IN Isolator 7100 ~ 7500MHz

## ADI730DDT(400)

### Features

- 21dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

### Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	7100 ~ 7500
Insertion Loss	dB Max.	0.60
Isolation	dB Min.	18
VSWR	Max.	1.2 : 1
Temperature	°C	- 20 ~ +80
REV Power	W Max.	20
Input/Output Impedance	Ω	50

### Mechanical Dimensions

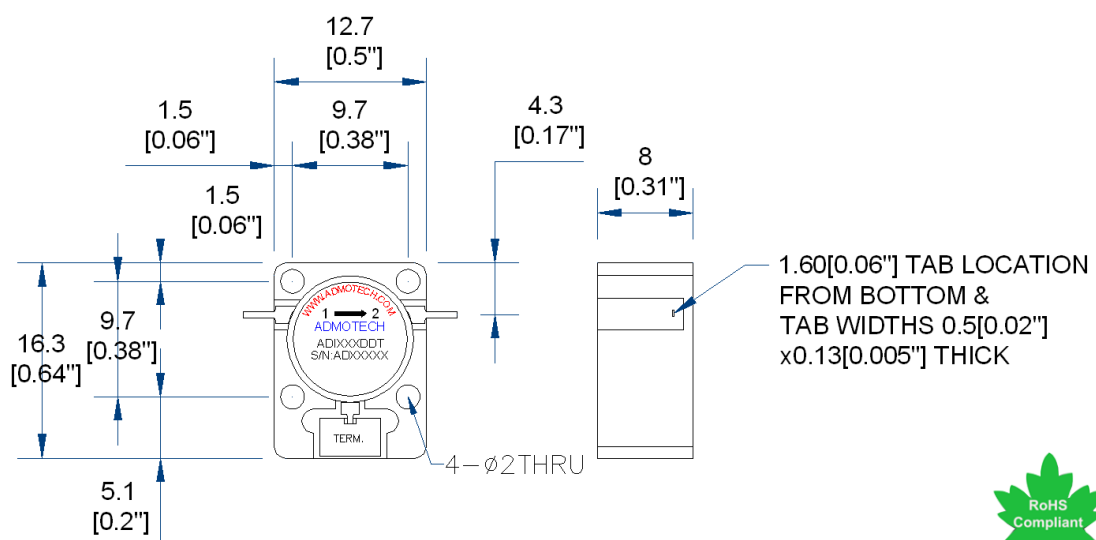

Package Size : DD

Unit: mm[inch]

Tolerance: ±0.2mm

Option Type : T

Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com