



## Features


- Ku Band Cavity Band Pass Filter.
- Very compact size and low weight
- Typical 1.2 dB Insertion Loss



## Specifications

Parameter	Specifications	Remarks
Frequency Range	15,940 MHz ~ 16,100 MHz	BW : 160 MHz
Center Frequency	16,020 MHz	
Insertion Loss (Max.)	1.5 dB	
Pass Band Ripple (Max.)	0.5 dB	
VSWR (Max.)	1.5 : 1	
Rejection (Min.)	70 dB @ 15,550 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 10 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	60 * 13 * 15 mm	Excluding Connectors
Connector	SMA (Female)	

## Outline drawing

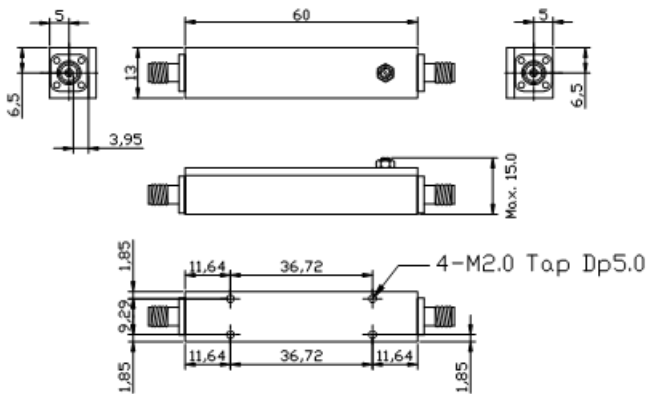

## Typical Response

