

Features


- Wideband Filter (5,280 MHz ~ 5,820 MHz)
- Very compact size and low weight
- Typical 0.6 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	5,280 ~ 5,820 MHz	BW : 540 MHz
Center Frequency	5,550 MHz	
Insertion Loss (Max.)	1.0 dB	
Pass Band Ripple (Max.)	0.5 dB	
Return Loss (Min.)	18.0 dB	
Rejection (Min.)	59 dBc @ 4.9 GHz	
	60 dBc @ 6.2 GHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	60 * 20 * 18 mm	Excluding Connectors
Connector	Pin Type	

Outline drawing

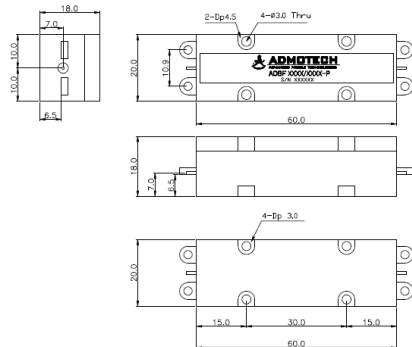

Typical Response

