



Features


- Ceramic Band Pass Filter (3,110 MHz ~ 3,190 MHz)
- Typical 2.8 dB Insertion Loss
- CW 2W Power Handling



Specifications

Parameter	Specifications	Remarks
Frequency Range	3,110~ 3,190 MHz	BW : 80 MHz
Center Frequency	3,150 MHz	
Insertion Loss (Max.)	4.0 dB	
Return Loss (Min.)	14.0 dB	
Rejection (Min.)	40 dB @ $F_o \pm 100$ MHz	
	25 dB @ 4,500 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-54°C ~ +105 °C	

Outline drawing

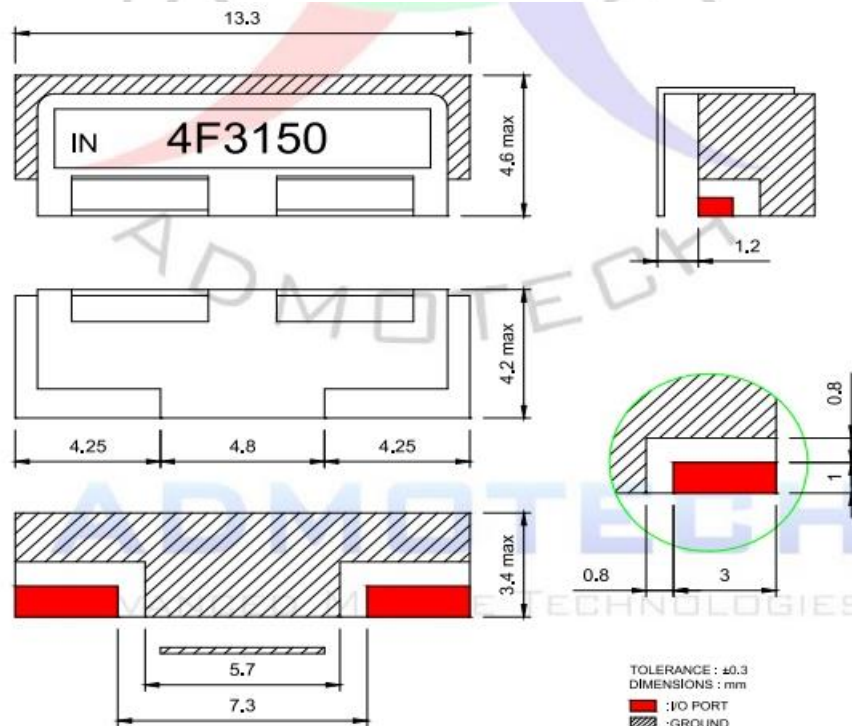

Typical Response

