


Features


- Ceramic Band Pass Filter (4,975 MHz ~ 5,325 MHz)
- Very compact size
- Typical 1.6 dB Insertion Loss

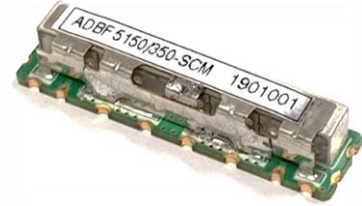


Specifications

Parameter	Specifications	Remarks
Frequency Range	4,975~ 5,325 MHz	BW : 350 MHz
Center Frequency	5,150 MHz	
Insertion Loss (Max.)	3.0 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	60 dB Min. @ 4,750 MHz	
	60 dB Min. @ 5,550 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-54°C ~ +105 °C	

Outline drawing

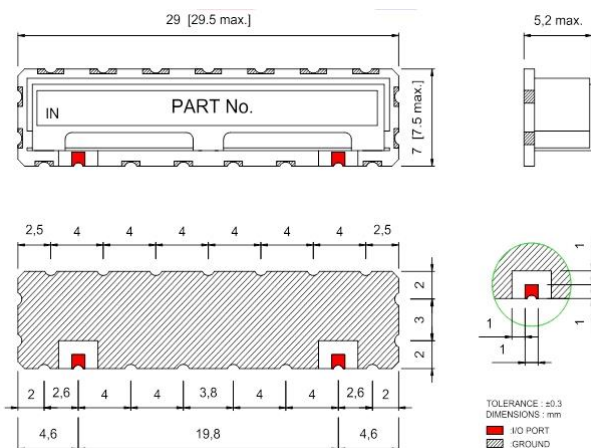

Typical Response

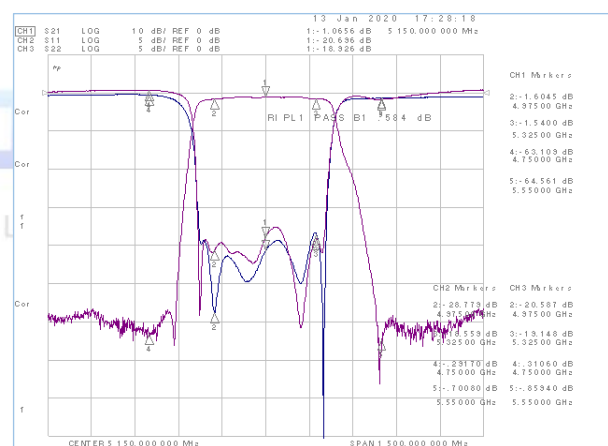

Units : mm, Tolerance : +/- 0.3 mm