

Features


- Ceramic Band Pass Filter (5,390 MHz ~ 5,510 MHz)
- Typical 2.9 dB Insertion Loss
- CW 2W Power Handling



Specifications

Parameter	Specifications	Remarks
Frequency Range	5,390~ 5,510 MHz	BW : 120 MHz
Center Frequency	5,450 MHz	
Insertion Loss (Max.)	4.0 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	60 dB @ 5,250 MHz	
	60 dB @ 5,650 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-54°C ~ +105 °C	

Outline drawing

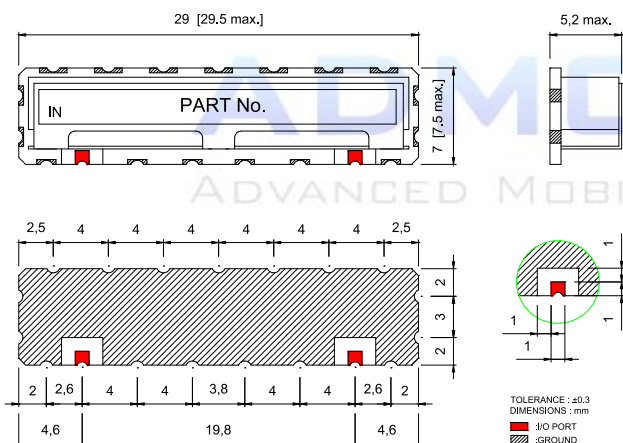

Units : mm, Tolerance : +/- 0.3 mm

Typical Response

