

## Features


- Cavity Band Pass Filter (5,470 MHz ~ 5,490 MHz)
- Very compact size and low weight
- Typical 1.9 dB Insertion Loss



## Specifications

Parameter	Specifications	Remarks
Frequency Range	5,470 ~ 5,490 MHz	BW : 20 MHz
Center Frequency	5,480 MHz	
Insertion Loss (Max.)	3.0 dB	
Pass Band Ripple (Max.)	1.5 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	75 dB @ 5.2 GHz	
	45 dB @ 5.4 GHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	60 * 20 * 18 mm	Excluding Connectors
Connector	SMA (Female)	

## Outline drawing

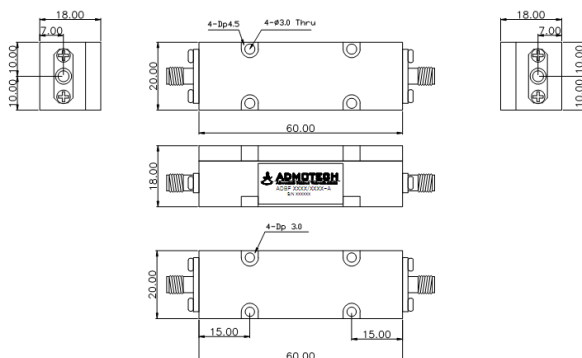

## Typical Response

