

Features


- ADBRF 4665-4675-A composed of BAND STOP FILTER
- Typical 3.9 dB Insertion Loss
- Typical 42.0 dB Stop Band Attenuation



Specifications

Parameter	Specifications	Remarks
Pass Band Frequency Range	DC ~ 4,665 MHz, 4,675 ~ 6,500 MHz	
Insertion Loss (Max.)	5.0 dB @ Pass Band	
Stop Band Attenuation (Min.)	40 dB @ 4,669 ~ 4,671 MHz	
Return Loss (Min.)	10 dB @ Pass Band	
Max. Input Power	10 W	
Operating Temp. Range	10 ~ 55 °C	
In/ Out Impedance	50 Ω	
Dimensions	91.0 * 197.0 * 22.0 mm	Exclude Connectors
Connector	SMA (F)	

Outline drawing

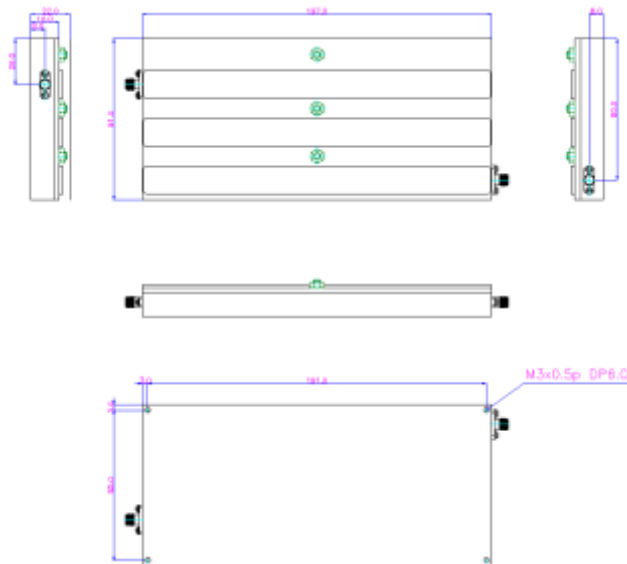

Units : mm, Tolerance : +/- 0.2 mm

Typical Response

