



# Coaxial SMA Type Circulator 1800 ~ 2500 MHz

## ADC215CSQH(700)


### Features

- 11dB typical Isolation, 0.85dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Electrical Characteristics

| Parameter              | Units   | Specifications |
|------------------------|---------|----------------|
| Frequency              | MHz     | 1800 ~ 2500    |
| Insertion Loss         | dB Max. | 1.05           |
| Isolation              | dB Min. | 9              |
| VSWR                   | Max.    | 2.32 : 1       |
| Temperature            | °C      | - 30 ~ +85     |
| FDW./REV. Power        | W Max.  | 150/100        |
| Input/Output Impedance | Ω       | 50             |

### Mechanical Dimensions

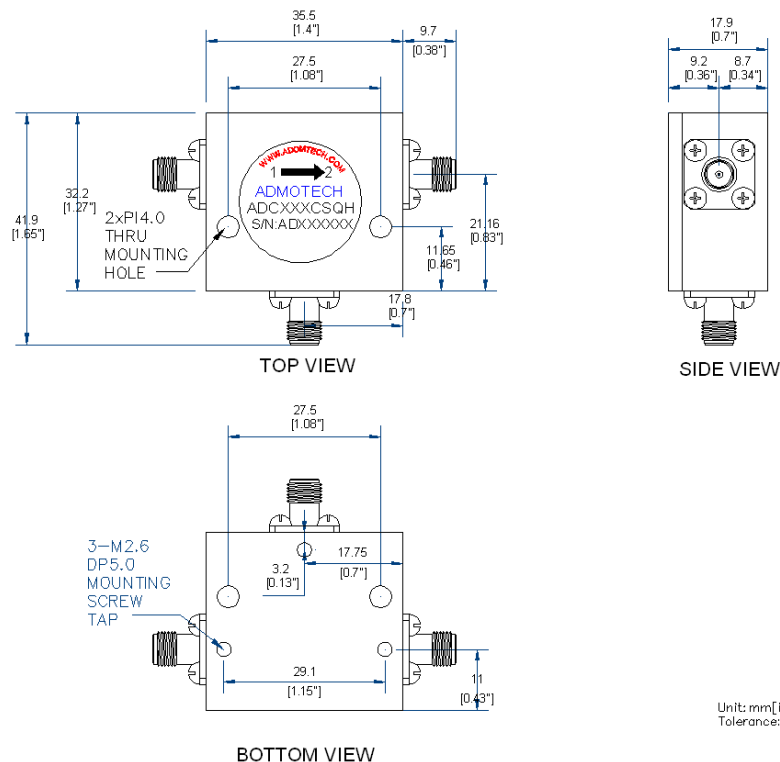

If you do not find appropriate frequency range, Please contact with sales@admotech.com