



Coaxial SMA Type Circulator 2500 ~ 6500 MHz

ADC2565CSIH

Features

- 14dB typical Isolation, 0.5dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant


Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2500~6500
Insertion Loss	dB Max.	1.0
Isolation	dB Min.	12.0
VSWR	Max.	1.67 : 1
Temperature	°C	-20 ~ 60
FWD./REV. Power	W Max.	50/50
Input/Output Impedance	Ω	50

Mechanical Dimensions

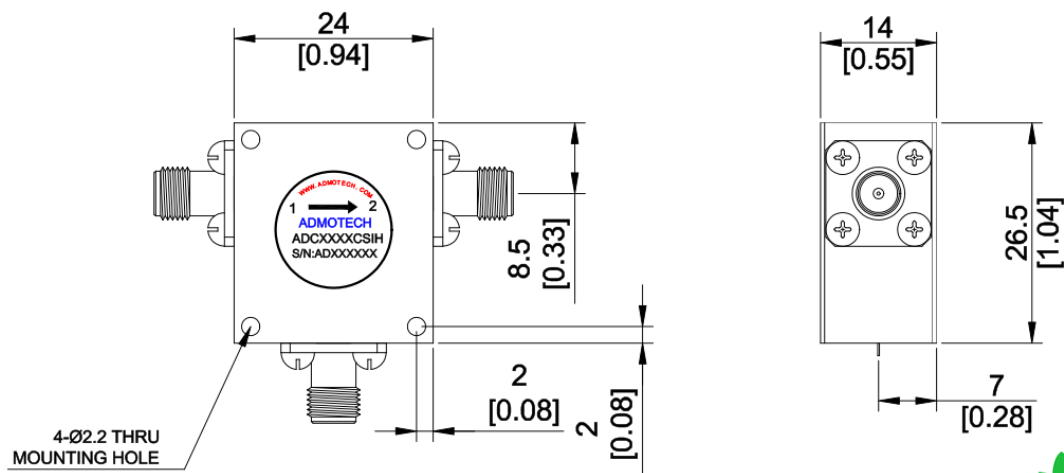

TOP VIEW

SIDE VIEW



unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, please contact with sales@admotech.com