



Coaxial SMA Type Circulator

4800 ~ 4900 MHz

ADC485CSYH


Features

- 21dB typical Isolation, 0.40dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	4800 ~ 4900
Insertion Loss	dB Max.	0.55
Isolation	dB Min.	19
VSWR	Max.	1.29 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	60/50
Input/Output Impedance	Ω	50

Mechanical Dimensions

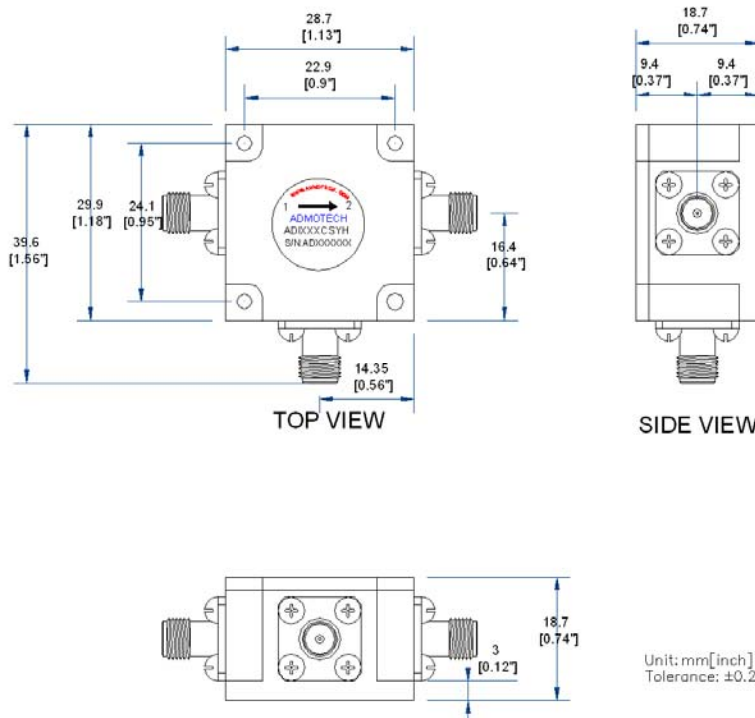

Unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, Please contact with sales@admotech.com