



Coaxial SMA Type Isolator

869 ~ 894 MHz

ADI088CSPH



Features

- 23dB typical Isolation, 0.30dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Electrical Characteristics

| Parameter | Units | Specifications |
|------------------------|---------|----------------|
| Frequency | MHz | 869 ~ 894 |
| Insertion Loss | dB Max. | 0.40 |
| Isolation | dB Min. | 21 |
| VSWR | Max. | 1.25 : 1 |
| Temperature | °C | - 30 ~ +85 |
| FDW./REV. Power | W Max. | 150/100 |
| Input/Output Impedance | Ω | 50 |

Mechanical Dimensions

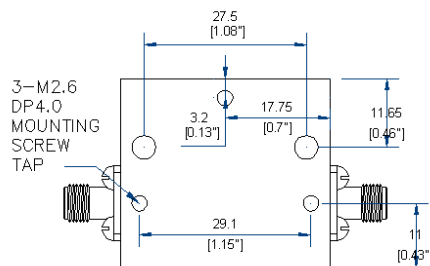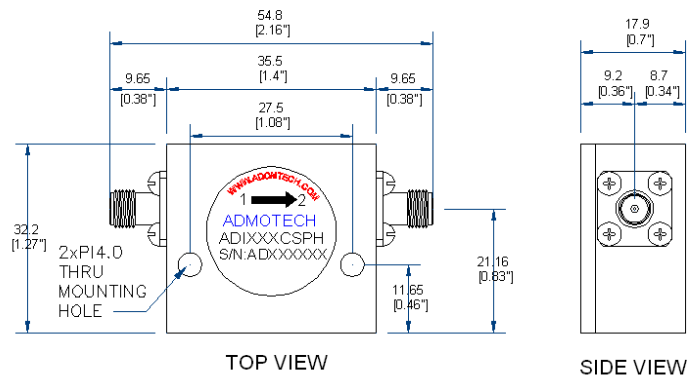

Unit:mm[inch]
Tolerance : ±0.2mm



If you do not find appropriate frequency range, Please contact with sales@admotech.com