



# Coaxial SMA Isolator 3400 ~ 4200 MHz

## ADI380CSIH

### Features

- 23dB typical Isolation, 0.2dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

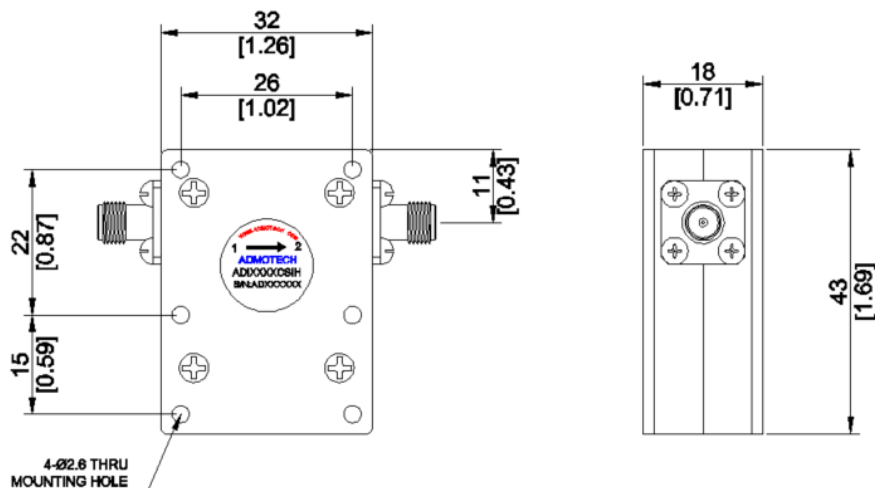
### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	3400~4200
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
VSWR	Max.	1.2 : 1
Temperature	°C	-30 ~ 85
FWD./REV. Power	W Max.	50/50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]  
Tolerance: ±0.2mm



If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)